

# SLURRY VAC VACUUM TANKER

1100 Slurri-Vac



The Slurri-Vac has been designed and constructed to ensure the load is perfectly balanced between the tractor and the tanker axle and that the best possible traction is achieved with absolute minimum soil damage.

The automatic top trap eliminates contamination of the vacuum pump. The trap is operated by the pressure of air passing it, rather than contact with slurry giving


The Major Slurri-Vac is ideal for all slurry handling needs. There are four models with capacities of 1100, 1300, 1600 & 1850 Gallons.

The Slurri-Vac has been carefully designed and constructed and is a high quality, reliable machine which is easily operated in all conditions.

highly reliable protection to the pump.

All models in the Major range are available in a galvanised or two pack paint finish. The paint is baked onto the tank and then assessed to ensure a long lasting protective coat. Galvanising prevents corrosion thus extending the life of the tank.

			
21.3 R 24	550/60 x 22	16.5 x 22.5	15 x 22.5
Radial Tyre			
W = 540	W = 550	W = 425	W = 385
D = 1400	D = 1232	D = 1130	D = 1100

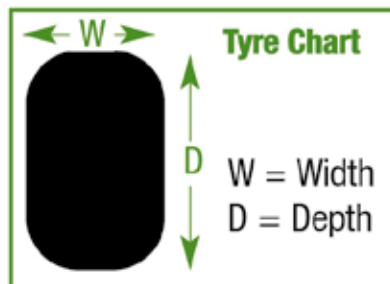

There is a Slurri-Vac to meet all requirements with many optional extras available.

MODEL	OA Length (Hitch to coupling ball)	OA Width (Tyre dependant)	OA Height (Add tractor hitch)	Weight (Empty)	Weight (Full)
1100	5.4m	2.3m	2.5m	1650Kg	6650Kg
1300	5.5m	2.55m	2.8m	2020Kg	8065Kg
1600	6.2m	2.55m	2.8m	2300Kg	9550Kg
1850	6.9m	2.55m	2.96m	2720Kg	11190Kg