

Take a 360°  
virtual tour



# Dribble Bar


## Retro-Fit Universal Tanker Mounted Dribble Bar

The MAJOR Dribble Bar slurry applicator is designed to apply slurry to the soil surface as accurately as possible, while minimising grass contamination and ammonia emissions. This unit has 30 outlets spaced 260mm apart for even and precise distribution of liquid material in long and short grass.

A high-strength steel is used in the manufacture of the MAJOR Dribble Bar and is hot dipped galvanised to increase durability and lifespan.

### Features

- ✓ Easily mounted onto the back door without welding or fabricating for simple retro-fitting
- ✓ Choice of Vogelsang ExaCut or Mastek macerator. Both units distribute the slurry precisely and constantly
- ✓ Can be used with the existing splashplate in place
- ✓ Simple height adjustment allows the unit to be set according to tanker height making it adaptable to any tanker make or model.
- ✓ Full lighting board is fitted as standard
- ✓ Double self-aligning pivot hinge with easy access grease point on each wing
- ✓ Hydraulic breakaway (optional extra)

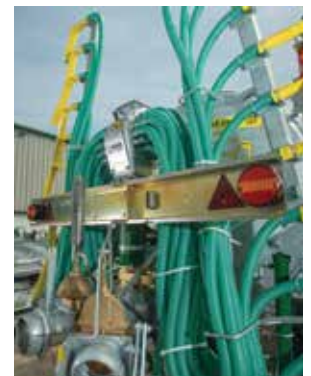

Model	MJ91-750
Working Width	7.5m (24' 7")
Transport Width	2.2m (7'2")
Wing pivot	100°
Height	2.8m (9' 2")
No. of outlets	30
Weight	450KG *including back door
Macerator	Vogelsang ExaCut 30/40 or Mastek
Spools required	2 double acting hydraulic spools
Back door size	20" + 30"
Rear fill	Yes
Note	Can be self retro fitted



# Dribble Bar

## Factory-Fitted Dribble Bar

The MAJOR Dribble Bar slurry applicator is designed to apply slurry to the soil surface as accurately as possible, while minimising grass contamination and ammonia emissions. These units have 40 or 48 outlets spaced evenly apart for precise distribution of liquid material in long and short grass.

A high-strength steel is used in the manufacture of the MAJOR Dribble Bar and is hot dipped galvanised to increase durability and lifespan.



Model	MJ91-1000	MJ91-1250
Working Width	10.1m (33' 2")	12.2m (40')
Transport Width	2.2m (7'2")	2.2m (7'2")
Wing pivot	95°	95°
Height	2.4m (7'11")	2.4m (7'11")
No. of outlets	40	48
Weight	900kg	1,020kg
Macerator	Vogelsang ExaCut 40/40	Vogelsang ExaCut 48/40
Spools required	2 double acting hydraulic spools	
Rear fill	Yes	Yes

### Note

Factory fitted. Suitable 2400 gallon tankers +

Factory fitted. Suitable for 2600 gallon tankers +

## Features

- ✓ Factory fitted with a supporting buttress welded to the tank chassis
- ✓ Vogelsang ExaCut macerator distributes slurry precisely and consistently
- ✓ Can be used with the existing splashplate in place
- ✓ Full lighting board is fitted as standard
- ✓ Double self-aligning pivot hinge with easy access grease point on each wing
- ✓ Hydraulic breakaway as standard