




# Off-set Mower

for the maintenance of parks, verges

Models in this range: OSM-1400, OSM-2000

This is a versatile and nimble machine designed for professional users. Thanks to the durable and pivoting headstock, this machine easily copes with the most extreme work conditions.

The machine gives you precision cutting and can operate from 96° to -45° either fully offset or inline behind your tractor. When cutting grass, the roller system allows the machine to follow the contours of the most undulating ground to give a perfect finish.

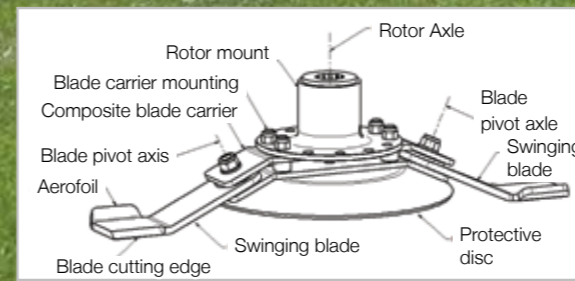

Product Specifications		
Model	OSM-1400	OSM-2000
Overall Width	1.40m (4' 7")	2.05 m (6' 9")
Working Width	1.35m (4' 5")	2.00m (6'6")
Power (HP)	40-130 HP	60-130 HP
PTO rpm	540	540
Cutting Height	12-150mm	12-150mm
Rotors	2	3
Blades	4/8	6/12
Weight	685 kg	800 kg
Sliding Offset	1.56 m	1.56 m
Hedge cutting	0 - 96°	0 - 96°
Road side mowing	0 - -45°	0 - -45°
Tractor Class	II	II

**A versatile machine that guarantees a minimum fuel saving of 30% when compared to flail mowers.**

- ✓ A unique patented blade system. In the event of a hitting an obstacle, the blades retract upwards out of the line of impact preventing breakages and damage to gearboxes and driveline.
- ✓ Internal double roller bearing housing to support the rollers while cutting and protect the bearings
- ✓ Heavy duty gearboxes with inter gearbox shock loading protection, to protect the machine in the event of a collision.
- ✓ Simple height adjustment system
- ✓ Low maintenance machine with less wearing parts than a flail mower.

Scan the QR code to see a working video

