



CYCLONE

Rotary Heavy Duty Mower



Rotary Mower

Three Point Linkage

Models in this range: MJ30-200, MJ30-250, MJ30-280, MJ30-300, MJ30-350, MJ30-420 and MJ30-560

The award winning range of Cyclone Mowers has been designed to do the work of a flail mower but requires a fraction of the power and fuel that a flail mower would consume.

These machines are strong, rugged and robust; specifically designed for use in set-aside, forestry margin management and sensitive environmental scrubland control. This machine easily copes with the toughest of conditions including shrub, saplings, gorse and brush. It is ideal for the clearance of arable stubble, maize and rapeseed crops.

Save 25% on your fuel bill with the MAJOR Cyclone Mower!

Product specifications							
Model	MJ30-200	MJ30-250	MJ30-280	MJ30-300	MJ30-350	MJ30-420	MJ30-560
Overall width	2.10m (7')	2.65m (8'9")	3.00m (10')	3.00m (10')	3.65m (12')	4.43m (14'6")	5.81m (19')
Cutting width	2.00m (6'5")	2.50m (8'1")	2.80m (9'2")	2.85m (9'4")	3.50m (11'5")	4.20m (13'9")	5.60m (18'4")
Transport width	2.10m (7')	2.65m (8'9")	3.00m (10')	3.00m (10')	2.50m (8'2")	2.50m (8'2")	2.03m (6'7")
No. of Blades	12	16	16	12	20	24	32
No. of Rotors	3	4	4	3	5	6	8
Power (HP)	50-100 HP	70-120 HP	80-120 HP	80-140 HP	90 -140 HP	100-150HP	110-150HP
PTO (rpm)	540/1000	1000	1000	1000	1000	1000	1000
Blade speed	75m/s	75m/s	58m/s	75m/s	58m/s	58m/s	58m/s
Cutting height	40-200mm	40-200mm	40-200mm	40-200mm	50-170mm	50-170mm	50-170mm
Weight	600kg	785kg	945kg	890kg	1120kg	1265kg	1680kg



Our Cyclone has been a great purchase because I can use it for mulching shrub as well as topping and general grassland maintenance and we can use a much smaller tractor now.


Owenie McGowan, Drystock Farmer, Co Leitrim.



Strenx™ 700 MC high-strength steel is used in the manufacture of these machines. This material is stronger than steel traditionally used in machinery manufacturing. The undersole discs are produced from Hardox® 450, a wear and abrasion resistant steel. An optional side shift unit is available which allows the operator adjust the mower 30cm to the left and right.



- ✓ Can be front or rear mounted (to be specified when ordering)
- ✓ Patented 'blender' double chop blade system
- ✓ 25% less power and fuel consumption required than a similar sized flail machine
- ✓ Impact shock reducing swinging hardened spring steel blades
- ✓ Low maintenance machine with less wearing parts than a flail mower
- ✓ Heavy duty rear roller

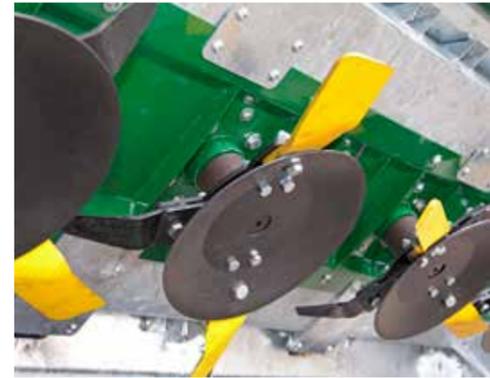



*engineering excellence
for over 40 years*

Major Equipment Intl Ltd
Head Office
Ballyhaunis
Co. Mayo, F35 C891
Ireland
Tel: + 353 (0) 9496 30572
info@major-equipment.com

Major Equipment Ltd
UK Office
Major Ind. Estate, Heysham
Lancs, LA3 3JJ
UK
Tel: + 44 (0) 1524 850501
ukinfo@major-equipment.com

Major Equipment Europe
Postbus 29
NL-7700 AA
Dedemsvaart
Nederland
Tel: + 31 (0) 6389 19585
euinfo@major-equipment.com