



Roller Mowers

Winged, Three Point Linkage

Models in this range: MJ71-340, MJ71-400, MJ71-540

Units for wide area mowing that don't compromise quality of cut, or high work rate, to give that all important after-cut appearance. A 60mm blade overlap and a custom designed gearbox, together with a high blade tip speed means a professional striped effect is easily achieved.

These units are built using Strenx™ 700 MC high-strength steel and hot-dip galvanized to EN ISO 1461:2009. Galvanization not only extends the life span, but also reduces maintenance and enhances the trade-in value of your investment. Transportation is easy with the

Scan the QR code to see a working video




wings folded, there's an LED road lighting kit available, and a transport width of 1.9m makes it straightforward to gain entrance where tight access is an issue. You also have peace of mind with a 3-year MAJOR warranty on your mower. The 1.9m transport width allows for easy access with wing lock for safe road transportation

- ✓ 1.9m transport width for easy access with wing lock for safe road transportation
- ✓ Walterscheid PTO drive shafts fitted as standard
- ✓ Sits tight behind the tractor making towing easy and allows tighter turning circles
- ✓ Bodies are produced from Strenx™ 700 MC high-strength steel and hot-dip galvanized to EN ISO 1461:2009.
- ✓ The overall weight of the machine is lighter than equivalent width mowers on the market, without compromising on build quality - hot-dip galvanized body extends the life span of the mower



Road lighting kit

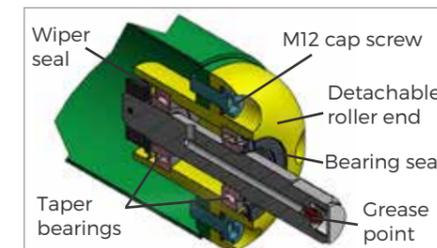

Internal roller bearings (on all MAJOR Swift and Synergy mowers)

“ We have used other mowers in the past, however the finish given by the MAJOR 5.4m Swift was far superior to any other machine. We can cover over 15 acres an hour. The quality of cut is excellent and it's a very reliable mower. ”
 Gordon McMurdo, Director at Albar Turf

Product specifications			
Model	MJ71-340	MJ71-400	MJ71-540
Overall Width	3.48m (11' 5")	4.16m (13' 8")	5.54m (18' 2")
Working Width	3.40m (11' 2")	4.00m (13' 1")	5.40m (17' 9")
Transport Width	1.90m (6' 3")	1.90m (6' 3")	1.90m (6' 3")
Power (HP)	40-90 HP	50-100 HP	50-120 HP
PTO rpm	540	540	540
Cutting Height	5-130mm	5-130mm	5-130mm
Rotors	5	6	8
Blades	10	12	16
Weight	940kg	1100kg	1270kg
Blade tip speed	75 m/s	75 m/s	75 m/s
Mowing Rates (Acres/hr at 7mph)	9.5	11.4	15.1