



# Cyclone Mower

## Heavy duty mulcher and shredder

Durability, reliability and efficiency are the key elements of the award-winning Cyclone Mower. From traditional pasture topping to clearing crop stubble, these machines are equally at home in set-aside, forestry margin management, and sensitive environmental scrubland control.

These rotary mowers are designed for the most rugged working environments with reduced power consumption, outperforming equivalent-sized flail mowers in every way.

Its patented 'blender' double-chop blade system requires 25% less HP than a flail mower, slashing at least 25% off upfront fuel costs. The Cyclone Mower is the mower of choice for the toughest jobs.

High-performance Strenx™ 700 MC structural steel makes these mowers strong, while Hardox® 450 abrasion-resistant steel for the undersole discs ensures a long wear life. Combined with hot-dip galvanisation to EN ISO 1461:2009 specifications, the Cyclone is guaranteed impact tough.

For increased flexibility, an adjustable side-shift unit which provides an additional 30cm cutting width on either side is available as an option.



### Features


- ✓ Save a minimum of 25% on power consumption and fuel costs
- ✓ Unique blade system for maximum mulching and shredding
- ✓ Low maintenance machine with less wearing parts than a flail mower
- ✓ Impressive forward speeds
- ✓ No wind rowing
- ✓ Heavy duty full-length rear roller
- ✓ Can be front or rear mounted (to be specified when ordering)
- ✓ The undersole discs are produced from Hardox® 450.
- ✓ Even distribution of cut material
- ✓ Multi-purpose mower; ideal for heavy scrub and stubble management

“

*We're very happy with the Cyclone Mower. The speed at which we can cut combined with the fantastic finish the Cyclone gives, meant we no longer needed flail mowers or large wing mowers.*

Shannon Edwards, Enviro Culture, NSW, Australia.

”

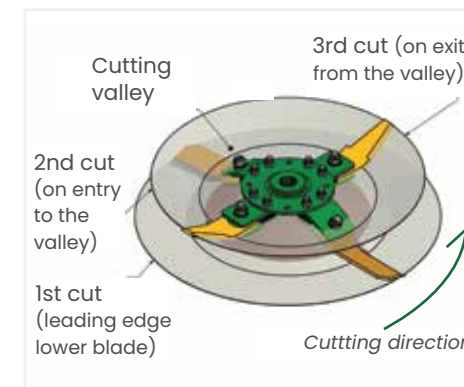

Model	MJ31-200	MJ31-250	MJ31-280	MJ31-300	MJ30-350	MJ30-420*	MJ30-560	MJ30-630
<b>Overall width</b>	2.10m (7')	2.65m (8' 9")	3.00m (10')	3.00m (10')	3.65m (12')	4.43m (14' 6")	5.81m (19')	6.52m (21' 5")
<b>Working width</b>	2.00m (6' 5")	2.50m (8' 1")	2.80m (9' 2")	2.85m (9' 4")	3.50m (11' 5")	4.20m (13' 9")	5.60m (18' 4")	6.30m (20' 8")
<b>Transport width</b>	2.10m (7')	2.65m (8' 9")	3.00m (10')	3.00m (10')	2.50m (8' 2")	2.50m (8' 2")	2.03m (6' 7")	2.80m (9' 2")
<b>Rotors</b>	3	4	4	3	5	6	8	9
<b>Blades</b>	12	16	16	12	20	24	32	36
<b>Power</b>	50-100 HP	70-120 HP	80-120 HP	80-140 HP	90-140 HP	100-150HP	110-150HP	140-190HP
<b>PTO rpm</b>	540/1000	1000	1000	1000	1000	1000	1000	1000
<b>Blade speed</b>	75m/s	75m/s	58m/s	75m/s	58m/s	58m/s	58m/s	58m/s
<b>Cutting height</b>	40-200mm	40-200mm	40-200mm	40-200mm	50-170mm	50-170mm	50-170mm	50-170mm
<b>Weight</b>	600kg	785kg	945kg	890kg	1120kg	1265kg	1680kg	1875kg