



# Synergy Mower Deck

for Kubota, John Deere, Iseki and Shibaura outfront power units

The Major Synergy Mower is a heavy duty out front rotary mower. It is designed for use with the John Deere 1400 and 1500, Kubota F Series, Shibaura and Iseki SF out front ride on mowers. The 3 rotor cutting deck delivers exceptional cutting and is the versatile alternative to an outfront flail mower.

The Major Synergy rotary mower offers groundcare staff extra versatility without compromising on finish quality. It delivers a professional striped finish even on coarser grass and terrain unsuitable for belt driven mowers making it suitable for sports grounds, roadsides, schools, parks and other fine turf applications. The Major Synergy rotary mower offers expert reliability, durability and lower running costs to provide a compelling cost-effective option. It features fewer wearing parts – approximately half those of a typical flail mower.


The body is produced from Strenx™ 700 which is 220% stronger, yet much lighter than steel traditionally used in machinery manufacturing.



As a result the overall weight of the machine is reduced without compromising on build quality. The Major Synergy rotary mower is ideal for sports pitches and parklands and will appeal to local authorities, landscape gardeners and other groundcare professionals that demand a versatile mower deck capable of delivering a professional finish across a variety of grass lengths and types.



Synergy driveline and blade configurations

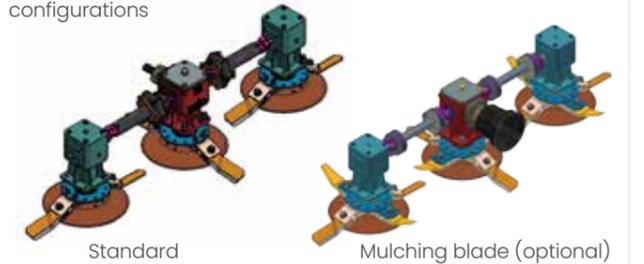

“

*The Major Synergy mower is very versatile because we can use it around the housing estates and then mow the cricket fields with the same machine. The roller on the rear gives a nice striped effect. It's impressively low maintenance and has proved to be a really useful bit of kit.*

Karl Garnham, West Patch Team Leader, Crawley Borough Council, UK

”

Model	MJ61-175	MJ61-200
<b>Overall Width</b>	1.75m (5' 9")	2.00m (6' 6")
<b>Working Width</b>	1.62m (5' 3")	1.88m (6' 3")
<b>Power (HP)</b>	20 HP	20 HP
<b>PTO rpm</b>	2100 rpm	2100 rpm
<b>Cutting Height</b>	10-118mm	10-118mm
<b>Rotors</b>	3	3
<b>Blades</b>	6	6
<b>Weight</b>	277kg	290kg
<b>Blade tip speed</b>	83 m/s	83 m/s



### Features

- ✓ Adjustable castor wheels
- ✓ Adjustable rear-roller with internal roller bearing
- ✓ Shock-absorbent couplings between gearboxes
- ✓ 153 mm (6") blade overlap