



Swift Roller Mower

Trailed

Offering the same qualities found in the three-point linkage models, the Swift Trailed Winged roller mower is designed to meet – and exceed – the requirements to maintain vast areas of grass for contractors, turf farms and local authorities.

Unlike other machines on the market, these wide area mowers are fitted with brakes and an LED lighting kit as standard to ensure safe transport between sites.

High-performance Strenx™ 700 MC structural steel makes these roller mowers strong. Combined with hot-dip galvanisation to EN ISO 1461:2009 specifications, these roller mowers outlive most of its competitors and retain their values.



Features


- ✓ Simple height adjustment from 10-130mm for versatile and year round mowing
- ✓ Gear-driven power line for low maintenance
- ✓ Walterscheid wide-angle PTO shafts
- ✓ Sealed internal roller bearings for total protection against moisture, soil and debris
- ✓ LED road lighting kit and fully braked for safe and legal road work
- ✓ 3-year MAJOR warranty

“

The Major Swift has a direct drive with gearboxes on each blade which copes with short grass and longer grass as well. We cut all that with one mower instead of buying a whole fleet, reducing our purchasing costs. Major mowers are cheap to run, cheap to maintain, but have that build and quality that will give you the perfect finish.

Will Power, Area Manager,
Cardiff Council Parks Services

”

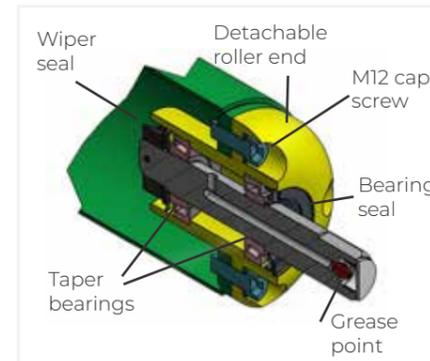

Internal roller bearings (on all MAJOR Swift and Synergy mowers)



Two in one blade system, rigid and swinging



10-130mm height adjustment for year round mowing

Model	MJ71-400T	MJ71-540T
Overall Width	4.16m (13' 8")	5.54m (18' 2")
Working Width	4.00m (13' 1")	5.40m (17' 9")
Transport Width	2.40m (8')	2.40m (8')
Power (HP)	50-100 HP	50-120 HP
PTO rpm	540	540
Cutting Height	10-130mm	10-130mm
Rotors	6	8
Blades	12	16
Weight	1665kg	1830kg
Blade tip speed	75 m/s	75 m/s
Mowing Rates (Acres/hr at 7mph)	11.4	15.1